


Technical data sealed CO₂ lasers – specification



	SR 10e 9.3µm
Laser beam data	
Wavelength ⁽¹⁾	9.3µm
Excitation	RF
Output power	
Power range (rated) ⁽²⁾	5 – 115W
Typical stability (long term) ⁽³⁾	± 3%
Peak power ⁽⁴⁾	330W
Minimum shipment power ⁽²⁾	>138W
Laser beam quality	
Diameter @ (1/e ²) (at laser o/p optic)	6.0 ± 0.5mm
Beam quality factor	M ² < 1.2 (K > 0.83)
Divergence (full angle far field)	< 2mrad
Pointing stability (half angle)	< 0.25mrad
Polarisation	Linear (parallel to base)
Ellipticity	< 1.2 : 1
RF input requirements	
DC input voltage	50VDC ± 1%
Maximum average DC input current ⁽⁵⁾	60A
Maximum peak DC input current	120A
Maximum average power consumption ⁽⁶⁾	3kW
Pulsed mode	
Frequency	0 – 130kHz
Pulse width	2 – 400µs
Energy	6 – 110mJ
Optical pulse rise/fall	< 60µs
Duty cycle (max)	50%
Dimensions and weights	
Laser head/RF	(LxWxH) 879x198x222 (mm) 32kg
External control facilities	
Laser head	Commands from external controller Status signal to external controller
DC Electrical ratings	
Input voltage range	230VAC ± 10% 50/60Hz. Single or bi-phase
Input current (max)	14A @ 230V
External fusing requirement	19A @ 230V
Output voltage	50V
Maximum output current	60A
Maximum output power ⁽⁶⁾	3kW
Earth leakage current	< 3mA

Cooling

Minimum flow rate	≥ 5L/min
Recommended flow rate	≥ 6L/min
Maximum pressure	6 bar
Refrigeration capacity	> 3.3kW
Temperature	19°C/66°F to 25°C/77°F ± 1°C (Above dew point)

Environmental requirements

Ambient temperature range	5 – 40°C
Relative humidity range	10 – 85% (non-condensing)
Operational altitude	< 2000m

Notes:

¹9.27µm is the predominant wavelength. This can typically vary in the range 9.2µm – 9.4µm.

² Mean average power at maximum duty cycle.

³ Guaranteed stability (long-term) is ± 6%.

⁴ Depending on frequency.


⁵400µs pulse width @ 50% Duty.

⁶ We recommend using a DC PSU with at least 20% head room on the maximum average power rating.


i.e. DC PSU power= maximum o/p*1.2

Please note that while every effort has been made to ensure that the data given in this document is accurate, the information, figures, illustrations, tables, specification and schematics contained herein are subject to change without notice

SR 10e

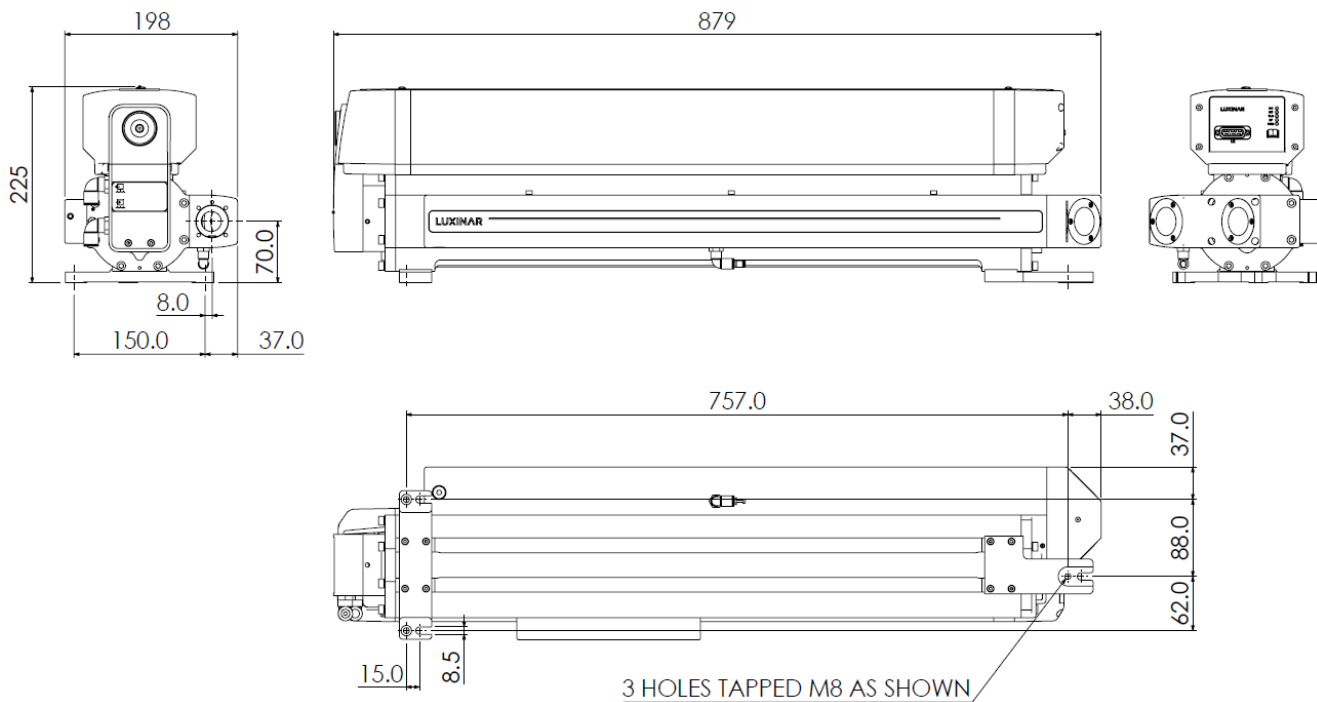

SR 10e – with shutter and diode assembly – optional

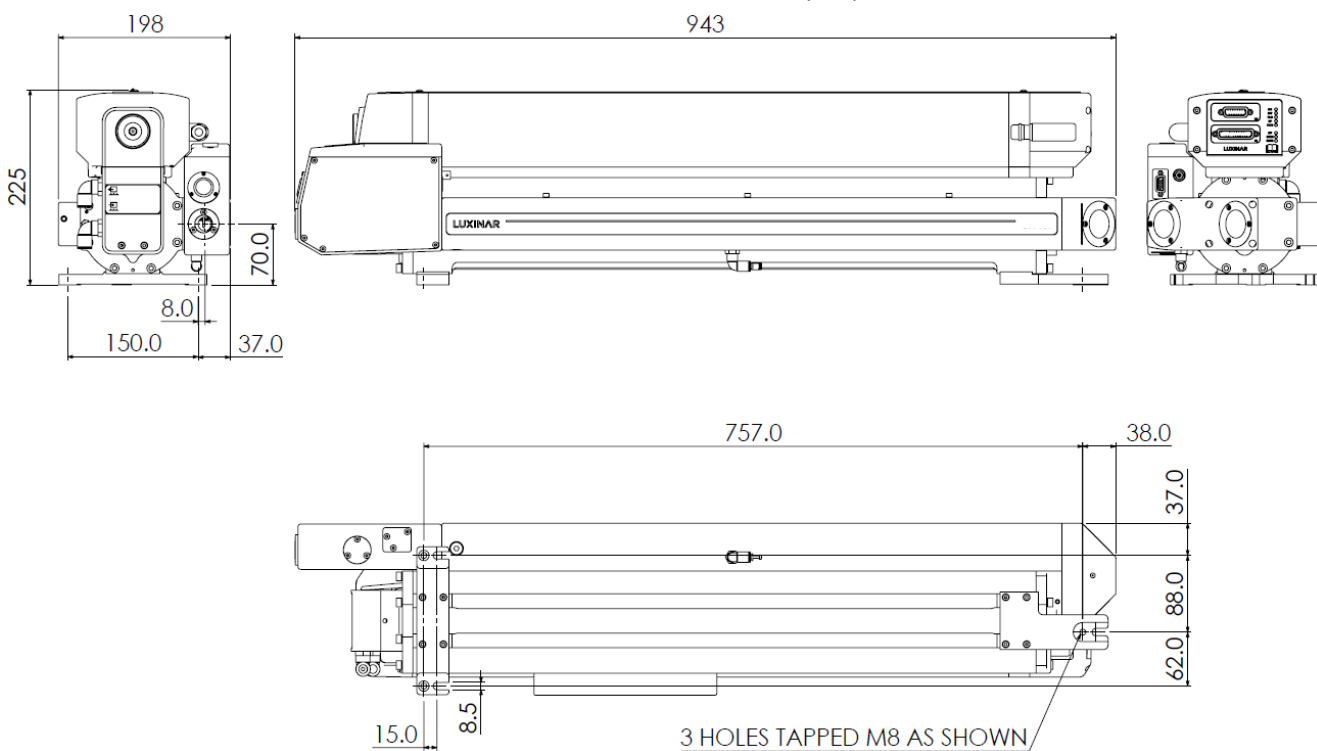

DC power supply – single phase, water cooled - 50V – optional

